




EMERGENCY LUMINAIRES WITH POWER LEDs

PRODUCED IN ACCORDANCE WITH: EN 60598-1, EN 60598-2-22

"Double Easy LEDs Light"

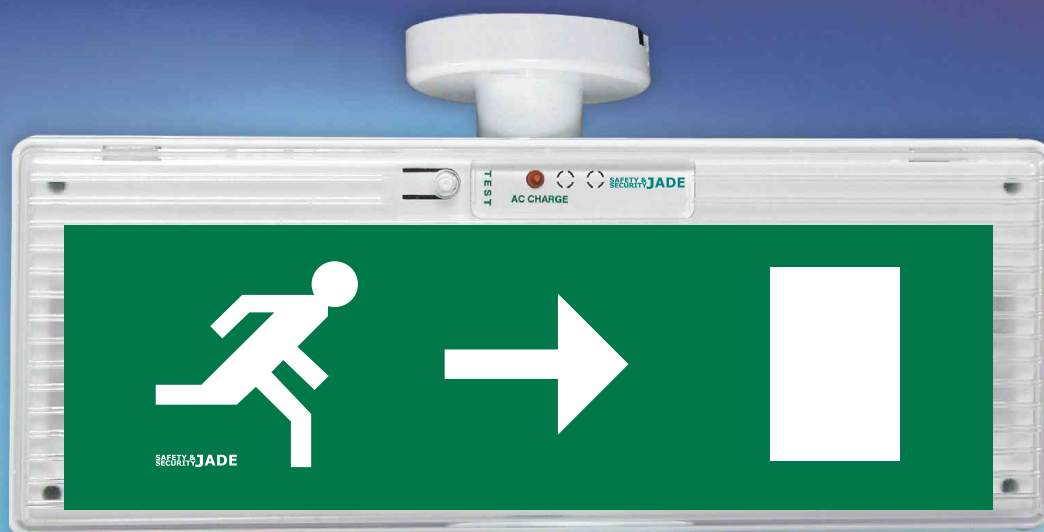

- ▶ The luminaires in the "Double Easy LEDs Light" series can be mounted easily on the ceiling or vertically on the wall, using special mounting accessories which are included in the package. They can be for double sided illumination or indication purposes.



- ▶ Batteries Ni-Cd
- ▶ Deep-discharge and over charge battery protection
- ▶ TEST button
- ▶ Charge indication LED
- ▶ Capability of mounting installation with newly designed convex diffusers, a transparent (CRV) and a semi-transparent (OPAL).
- ▶ Construction material: Bayblend Fr3010, transparent polycarbonate
- ▶ Operation temperature range : 0 to 40 °C
- ▶ Relative humidity: up-to 95%



S-31100/S65L



S-31100/S65R



S-31100/S65D



S-31100/S65U




S-31100/S236

SELF-TESTING, MAINTAINED LUMINAIRES

TYPE	OPERATION VOLTAGE	MAX. POWER CONSUMPTION	BATTERIES Ni - Cd	MIN. AUTON. DURATION	LIGHT OUTPUT (maint./emerg.)	WEIGHT
GR-390	220-240V AC/ 50-60Hz	13 VA	3.6V/1.5Ah	90 minutes	200/200 lm	870 gr.

ACCESSORIES

A-100	Extension rod 40cm for ceiling installation
S-31100	Exit sticker
A-2CRV	Set of two convex diffusers, transparent with button
A-2CRV/OPAL	Set of two convex diffuser (OPAL) semi-transparent with button

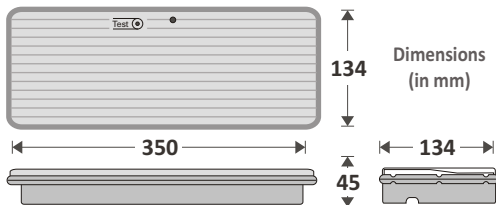

LEDs LEDs of high luminosity



90 minutes



Ni-Cd 3.6V/1.5Ah



22 metres



MOUNTING METHODS



CEILING MOUNTED



WALL MOUNTED

- Special accessory used for mounting and installation purposes. This accessory is included in the package. It is fastened on the suitable notches and has space for the connection terminal and cable.

3 years guarantee (1 year for battery)



Example of mounting installation with convex diffuser

- A-2CRV - Set of two convex diffusers, transparent & button
- A-2CRV/OPAL Set of two convex diffuser (OPAL) semi-transparent & button